

FIG. 4A


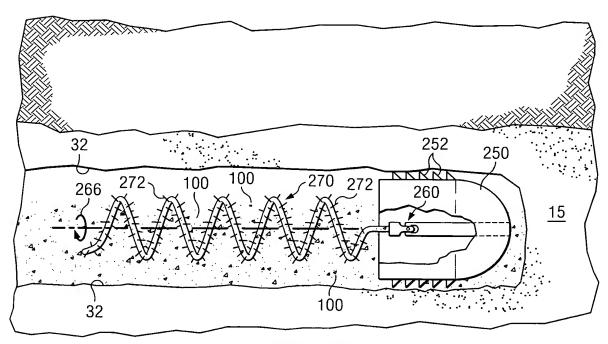


FIG. 4B

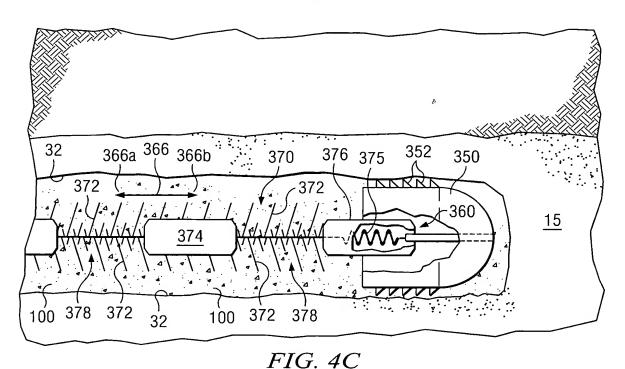

400

INSERT A WELLBORE CLEARING
SYSTEM INTO A WELLBORE

402

SECURE ANCHOR OF THE
WELLBORE CLEARING SYSTEM
WITHIN THE WELLBORE

MOVE AN AGITATOR OF THE
WELLBORE CLEARING SYSTEM
RELATIVE TO THE INTERIOR
SURFACE OF THE WELLBORE

REMOVE FLUID/ FINE

MIXTURE FROM WELLBORE

START

FIG. 5

406